



**SINGLE-SPLIT WALL MOUNTED TYPE SRK-ZR-S / SRK-ZS-S**


**9K to 36K BTU**



**Up to 25 SEER**

## KEY FEATURES

- All models has high energy class A.
- Quiet Air Flow & Long Reach is achieved by jet technology.
- Allergen clear operation cleans air, using a control scheme owned only by Mitsubishi Heavy Industries Thermal Systems.
- Wireless interface control (optional).

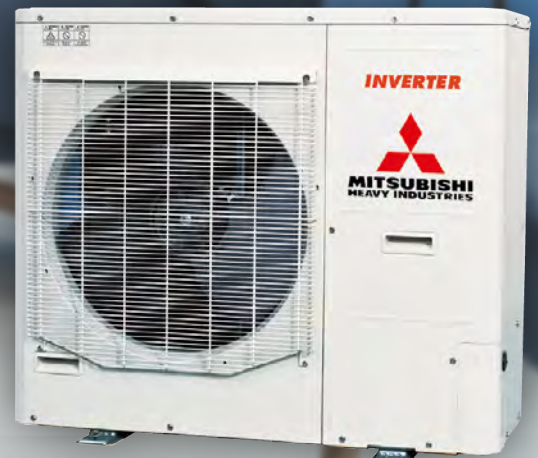

Distributed by:



Model		Unit	SRK25ZS-S SRC25ZS-S	SRK35ZS-S SRC35ZS-S	SRK50ZS-S SRC50ZS-S
Power Supply		V/Ph/Hz	220 - 240 / 1 / 50-60 Hz		
Cooling Capacity (Min-Max)		Btu/h	8,535 (3,414-10,242)	11,949 (3,414-12,973)	17,070 (5,803-18,777)
Cooling Power Input		kW	0.8	1.01	1.59
Air Flow Volume (H/M/L/SL)		CFM	349 / 282 / 208 / 176	399 / 307 / 247 / 177	427 / 349 / 261 / 208
EER/COP (Cooling/Heating)			4.03 / 4.0	3.47 / 4.00	3.21 / 3.65
SEER		-	--	22	19
IDU	Sound Pressure Level (H/M/L/SL)	dB(A)	36 / 28 / 23 / 19	40 / 30 / 26 / 19	45 / 36 / 28 / 22
	Dimension (HxWxD)	inch	11 7/16 x 34 1/4 x 9 1/16		
	Net Weight	lb	20.94	20.94	22.04
ODU	Sound Pressure Level	dB(A)	46	50	51
	Dimension (HxWxD)	inch	21 1/4 x 33 3/16 x 11 7/16	21 1/4 x 33 3/16 x 11 7/16	23 7/16 x 33 3/16 x 11 7/16
	Net Weight	lb	69.45	76.05	80.47
	Refrigerant	-	R410A	R410A	R410A
PIPE CONNECTION	Refrigerant Charge	oz	26.45	33.51	44.09
	Additional Refrigerant Charge	oz	0.22	0.22	0.22
	Connection Pipe Length	ft	49	49	49
	Outer Diameter Liquid Pipe	inch	1/4	1/4	1/4
	Outer Diameter Gas Pipe	inch	3/8	3/8	1/2
	Max Distance Height	ft	32.8	32.8	32.8
	Max Distance Length	ft	65.6	65.6	82

Model		Unit	SRK63ZR-S SRC63ZR-S	SRK71ZR-S SRC71ZR-S	SRK100ZR-S FDC100VNP
Power Supply		V/Ph/Hz	220 - 240 / 1 / 50-60 Hz		
Cooling Capacity (Min-Max)		Btu/h	21,508 (4,096-24,239)	24,239 (7,852-26,288)	34,414 (8,193-35,847)
Cooling Power Input		kW	1.85	2.05	3.09
Air Flow Volume (H/M/L/SL)		CFM	723 / 639 / 554 / 367	723 / 657 / 572 / 367	865 / 752 / 622 / 367
EER/COP (Cooling/Heating)			3.41/4.08	3.46/3.88	3.24/3.41
SEER		-	25	--	20
IDU	Sound Pressure Level (H/M/L/SL)	dB(A)	44 / 39 / 35 / 25	44 / 41 / 37 / 25	48 / 45 / 40 / 27
	Dimension (HxWxD)	inch	13 3/8 x 47 1/8 x 10 5/16	13 3/8 x 47 1/8 x 10 5/16	13 3/8 x 47 1/8 x 10 5/16
	Net Weight	lb	34.1	34.1	36.3
ODU	Sound Pressure Level	dB(A)	54	53	57
	Dimension (HxWxD)	inch	25 3/16 x 34 3/8 x 11 7/16	29 1/2 x 38 1/8 x 13 3/8	33 1/4 x 38 3/16 x 14 9/16
	Net Weight	lb	99	125.4	154
	Refrigerant	-	R410A	R410A	R410A
PIPE CONNECTION	Refrigerant Charge	oz	54.67	63.49	90
	Additional Refrigerant Charge	oz	0.22	0.27	0.65
	Connection Pipe Length	ft	49	49	49
	Outer Diameter Liquid Pipe	inch	1/4	1/4	3/8
	Outer Diameter Gas Pipe	inch	1/2	5/8	5/8
	Max Distance Height	ft	65.7	65.7	65.7
	Max Distance Length	ft	98.4	98.4	98.4



www.airconpr.com



OF. CENTRAL 787-707-0556    CAPARRA 787-782-0282    BAYAMÓN 787-779-8233    RÍO PIEDRAS 787-281-7202    PONCE 787-842-2400    MAYAGÜEZ 787-834-1408

TOA BAJA 787-780-0390    CAGUAS 787-258-0708    ARECIBO 787-816-9079    HUMACAO 787-285-2373    DPTO. COMERCIAL 787-707-0556