


SKY PRIME

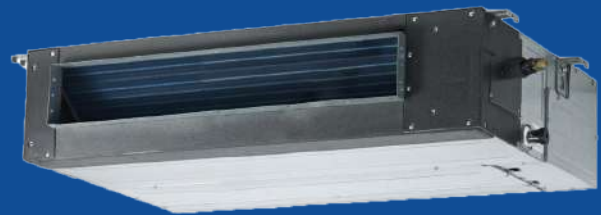

18K to 60K BTU

Up to 21.5 SEER

**Choose between Cassette,
Floor & Ceiling or Fan Coil**

AIR-CON



Outdoor Units



Cassette Unit

Model	Unit	ASGEC4H4M18 ASGCI4H4M18	ASGEC4H4M24 ASGCI4H4M24	ASGEC4H4M36 ASGCI4H4M36	ASGEC4H4M48 ASGCI4H4M48	
Power Supply	V/Ph/Hz	208-230/1/60				
Cooling Capacity (Min-Max)	Btu/h	16,000 (5,600 - 16,000)	24,000 (8,130 - 26,272)	36,000 (12,400 - 36,000)	48,000 (16,600 - 48,000)	
Heating Capacity (Min-Max)	Btu/h	18,400 (4,700 - 22,200)	27,200 (8,200 - 32,400)	41,000 (9,800 - 49,500)	54,500 (17,500 - 61,500)	
Cooling Power Input	W	1,340 (230-1,340)	1,920 (320-2,600)	4 000 (477-4,000)	5,050 (650-5,050)	
Heating Power Input	W	1,950 (470-1,950)	2,210 (630-2,900)	3,700 (666-3,700)	4,730 (660-5,200)	
EER	(Btu/h)/W	11	10.62	10.35	9.05	
SEER	-	16	16	16	16	
Air Flow Volume (SH,H,M,L)	CFM	562/485/438	764/705/635/547	1041/947/852/752	1288/1170/1058/935	
INDOOR UNIT	Sound Pressure Level (H/M/L)	46/41.5/39.5	49/46/43	52.5/50/46.5	55/53/50	
	Dimension (WxDxH)	22 7/16 x 22 7/16 x 10 1/4	32 11/16 x 32 11/16 x 8 1/16	32 11/16 x 32 11/16 x 9 5/8	32 11/16 x 32 11/16 x 11 5/16	
	Package Dimension (WxDxH)	26 1/16 x 26 1/16 x 12 1/2	35 13/16 x 35 13/16 x 9 13/16	35 13/16 x 35 13/16 x 11 7/16	35 13/16 x 35 13/16 x 13	
	Net Weight	35.71	47.18	59.97	64.59	
OUTDOOR UNIT	Gross Weight	46.96	55.34	69	74.07	
	Sound Pressure Level	60.5	61	63.5	65	
	Dimension (WxHxD)	35 1/16 x 13 7/16 x 26 1/2	37 1/4 x 16 1/8 x 31 7/8	37 1/4 x 16 1/8 x 31 7/8	37 1/2 x 16 5/16 x 52 1/2	
	Package Dimension (WxHxD)	39 3/16 x 15 11/16 x 29 1/8	42 15/16 x 19 11/16 x 34 13/16	42 7/8 x 19 3/4 x 34 7/8	43 1/8 x 19 1/2 x 58 1/4	
PIPE CONNECTION	Net/Gross Weight	94.36/100.97	124.78/134.92	155.42/166.23	219.14/249.12	
	Refrigerant	-	R410A	R410A	R410A	
	Refrigerant Charge	oz	56.4	82.9	112.9	158.7
	Connection Pipe Length	ft	98.42	164.04	213.25	213.25
	Connection Pipe Gas Add. Charge	oz/ft	0.16	0.32	0.32	0.32
	Outer Diameter Liquid Pipe	inch	1/4	3/8	3/8	3/8
	Outer Diameter Gas Pipe	inch	1/2	5/8	5/8	5/8
	Max Distance Height	ft	98.42	164.04	213.25	213.25
Max Distance Length	ft	65.62	82.02	98.42	98.42	



Fan Coil Unit

Model		Unit	ASGEK4H4M18 ASGCI4H4M18	ASGEK4H4M24 ASGCI4H4M24	ASGEK4H4M36 ASGCI4H4M36	ASGEK4H4M48 ASGCI4H4M48	ASGEK4H4M60 ASGCI4H4M60
Power Supply	V/Ph/Hz	208-230/1/60					
Cooling Capacity (Min-Max)	Btu/h	18,000 (5,800-18,000)	24,000 (6,100-28,200)	36,000 (5,973-36,000)	48,000 (12,077-48,000)	59,000 (12,000-62,000)	
Heating Capacity (Min-Max)	Btu/h	20,000 (5,000-20,000)	24,600 (11,700-33,000)	40,000 (12,765-40,000)	50,000 (11,607-50,000)	60,000 (12,000-60,000)	
Cooling Power Input	W	1,455 (240-1,455)	1,920 (290-2,680)	4,000 (298-4,161)	5,217 (475-5,217)	5,560 (1,100-6,346)	
Heating Power Input	W	1,880 (300-1,880)	2,030 (650-2,660)	3,478 (704-3,478)	4,885 (649-4,885)	4,950 (1,500-4,900)	
EER	Btu(h)/W	12.5	12.6	9	9.2	10.6	
SEER	-	20.5	21.5	16.7	17.4	19.2	
Air Flow Volume (SH,H,M,L)	CFM	529/450/370	775/693/434	1081/912/702	1529/1529/1117/735	2302/2155/1709/1261	
INDOOR UNIT	Sound Pressure Level (H/M)	dB(A)	42/38/35	44/41/37	48/43/40	52/50/49	57/54/51
	Dimension (WxDxH)	inch	34 5/8 x 26 9/16 x 8 1/4	43 5/16 x 30 1/2 x 9 13/16	53 9/16 x 30 3/8 x 9 13/16	47 1/4 x 34 7/16 x 11 13/16	55 1/8 x 33 3/4 x 18 1/8
	Package Dimension (WxDxH)	inch	42 1/8 x 28 9/16 x 11	51 3/8 x 31 11/16 x 12 3/8	61 13/16 x 31 11/16 x 13	55 5/16 x 36 x 14 3/8	63 3/16 x 35 13/16 x 21 1/16
	Net Weight	lb	55.34	90.39	110.89	119.71	174.6
	Gross Weight	lb	67.02	105.82	128.09	141.76	200.4
	Sound Pressure Level	dB(A)	60.5	61	63.5	65	62.5
OUTDOOR UNIT	Dimension (WxHxD)	inch	35 1/16 x 13 7/16 x 26 1/2	37 1/4 x 16 1/8 x 31 7/8	37 1/4 x 16 1/8 x 31 7/8	37 1/2 x 16 5/16 x 52 1/2	37 1/2 x 16 5/16 x 52 1/2
	Package Dimension (WxHxD)	inch	39 3/16 x 15 11/16 x 29 1/8	2 15/16 x 19 11/16 x 34 13/16	42 7/8 x 19 3/4 x 34 7/8	43 1/8 x 19 1/2 x 58 1/4	43 1/8 x 19 1/2 x 58 1/4
	Net/Gross Weight	lb	94.36/100.97	124.78/134.92	155.42/166.23	219.14/249.12	217.15/248.24
	Refrigerant	-	R410A	R410A	R410A	R410A	R410A
	Refrigerant Charge	oz	56.4	82.9	112.9	158.7	169
	Connection Pipe Length	ft	98.42	164.04	213.25	213.25	213.25
PIPE CONNECTION	Connection Pipe Gas Add. C	oz/ft	0.16	0.32	0.32	0.32	0.32
	Outer Diameter Liquid Pipe	inch	1/4	3/8	3/8	3/8	3/8
	Outer Diameter Gas Pipe	inch	1/2	5/8	5/8	5/8	7/8
	Max Distance Height	ft	98.42	164.04	213.25	213.25	213.25
	Max Distance Length	ft	65.62	82.02	98.42	98.42	98.42




Floor & Ceiling Unit

Model		Unit	ASGEL4H4M18 ASGCI4H4M18	ASGEL4H4M24 ASGCI4H4M24	ASGEL4H4M36 ASGCI4H4M36	ASGEL4H4M48 ASGCI4H4M48	ASGEL4H4M60 ASGCI4H4M60
Power Supply	V/Ph/Hz	208-230/1/60					
Cooling Capacity (Min-Max)	Btu/h	18,000 (6,200-18,000)	24,000 (7,700-25,500)	36,000 (11,476-36,000)	48,000 (15,861-48,000)	54,000 (15,000-54,000)	
Heating Capacity (Min-Max)	Btu/h	20,000 (8,100-20,000)	24,000 (11,600-30,900)	38,000 (11,467-38,000)	50,000 (12,159-50,000)	60,000 (17,000-60,000)	
Cooling Power Input	W	1,450 (230-1,450)	1,920 (320-2,600)	4,509 (480-4,358)	5,170 (650-5,170)	5,500 (1,400-5,800)	
Heating Power Input	W	2,010 (480-2,010)	1,920 (650-3,000)	3,978 (665-3,978)	5,861 (677-5,861)	5,800 (1,500-5,800)	
EER	Btu(h)/W	12.5	12.5	8	9.3	9.8	
SEER	-	21.5	20.0	17	18	18.7	
Air Flow Volume (H,M,L)	CFM	548/485/420	758/708/598	1036/917/637	1352/1117/1000	1384/1028/795	
INDOOR UNIT	Sound Pressure Level (H/M)	dB(A)	47/43/40	51/47/42	51/48/40	55/49/44	55/48/42
	Dimension (WxDxH)	inch	42 1/16 x 26 9/16 x 9 1/4	42 1/16 x 26 9/16 x 9 1/4	50 9/16 x 26 9/16 x 9 1/4	64 15/16 x 26 9/16 x 9 1/4	64 15/16 x 26 9/16 x 9 1/4
	Package Dimension (WxDxH)	inch	45 1/16 x 29 3/4 x 12 1/2	45 1/16 x 29 3/4 x 12 1/2	53 9/16 x 29 1/4 x 12 1/2	67 15/16 x 29 3/4 x 12 1/2	67 15/16 x 29 3/4 x 12 1/2
	Net Weight	lb	57.10	60.63	69	87.74	96.56
	Gross Weight	lb	68.34	72.09	81.57	102.29	111.99
	Sound Pressure Level	dB(A)	60.5	61	63.5	65	64
OUTDOOR UNIT	Dimension (WxHxD)	inch	35 1/16 x 13 7/16 x 26 1/2	37 1/4 x 16 1/8 x 31 7/8	37 1/4 x 16 1/8 x 31 7/8	37 1/2 x 16 5/16 x 52 1/2	37 1/2 x 16 5/16 x 52 1/2
	Package Dimension (WxHxD)	inch	39 3/16 x 15 11/16 x 29 1/8	2 15/16 x 19 11/16 x 34 13/16	42 7/8 x 19 3/4 x 34 7/8	43 1/8 x 19 1/2 x 58 1/4	43 1/8 x 19 1/2 x 58 1/4
	Net/Gross Weight	lb	94.36/100.97	124.78/134.92	155.42/166.23	219.14/249.12	217.15/248.24
	Refrigerant	-	R410A	R410A	R410A	R410A	R410A
	Refrigerant Charge	oz	56.4	82.9	112.9	158.7	169
	Connection Pipe Length	ft	98.42	164.04	213.25	213.25	213.25
PIPE CONNECTION	Connection Pipe Gas Add. C	oz/ft	0.16	0.32	0.32	0.32	0.32
	Outer Diameter Liquid Pipe	inch	1/4	3/8	3/8	3/8	3/8
	Outer Diameter Gas Pipe	inch	1/2	5/8	5/8	5/8	7/8
	Max Distance Height	ft	98.42	164.04	213.25	213.25	213.25
	Max Distance Length	ft	65.62	82.02	98.42	98.42	98.42

SKY PRIME

AIR-CON

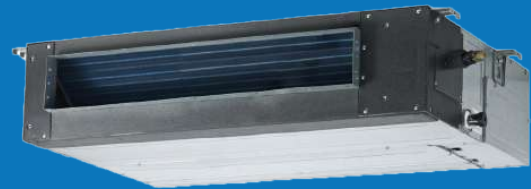

Inverter



www.airconpr.com

OF. CENTRAL
787-707-0556

CAPARRA
787-782-0282

BAYAMÓN
787-779-8233

RÍO PIEDRAS
787-281-7202

PONCE
787-842-2400

MAYAGÜEZ
787-834-1408

TOA BAJA
787-780-0390

CAGUAS
787-258-0708

ARECIBO
787-816-9079

HUMACAO
787-852-7772

DPTO. COMERCIAL
787-707-0556